


# TRANSDUCER VALVE


Brass or Forged Steel Design

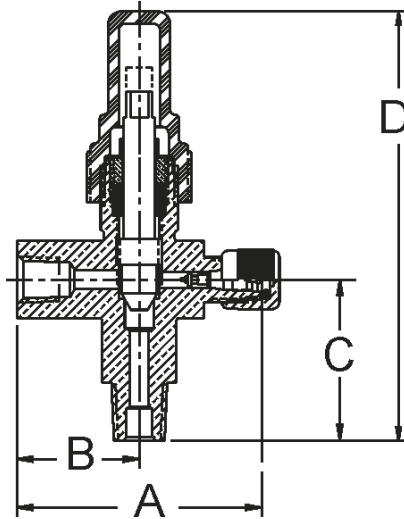

### Features:

- Forged brass
- Temperature rating: -20°F (-29°C) to +300°F (+149°C)
- Maximum working pressure: 500 PSI (35 Kg/cm<sup>2</sup>)
- Connector: 1/4" flare access with Schrader core
- Provides access to systems and mounting of a transducer to monitor systems performance
- Provides valve core port for checking transducer output with a pressure gauge
- Provides isolation from system for replacement of transducer
- Suitable for refrigerants and other industrial fluids non-corrosive to brass and steel

Catalog Number	Size Connection		Dimensions in Inches				Weight lbs.
	Side	Bottom	A	B	C	D	
9290	1/8 F.P.T.-1/4 FL.	1/4 M.P.T.	2.38	1.19	1.56	4.16	.52

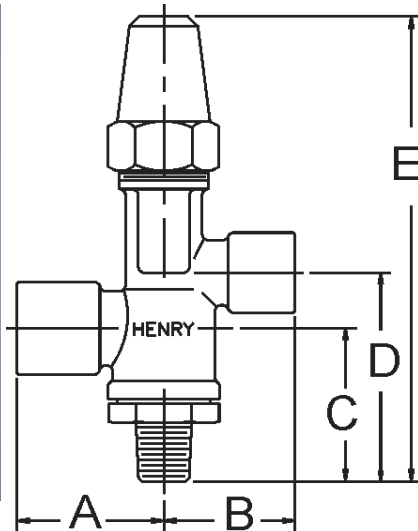

### Features:

- Forged steel body
- Provides access to system and mounting of a transducer to monitor system performance
- Provides valve port for checking transducer output with a pressure gauge
- Provides isolation from system for replacement of transducer
- Maximum working pressure: 500 P.S.I. (35.1 Kg/cm<sup>2</sup>)
- Temperature rating: -20°F (-29°C) to +300°F (+149°C)
- Suitable for ammonia and other industrial fluids non-corrosive to steel

Catalog Number	Inlet	Outlet	Dimensions in Inches					Weight lbs.
	M.P.T.	F.P.T.	A	B	C	D	E	
9490	1/4"	1/4"	1.44	1.25	1.56	2.13	4.75	.75