

ASME HORIZONTAL

Liquid Receivers



Figure 2


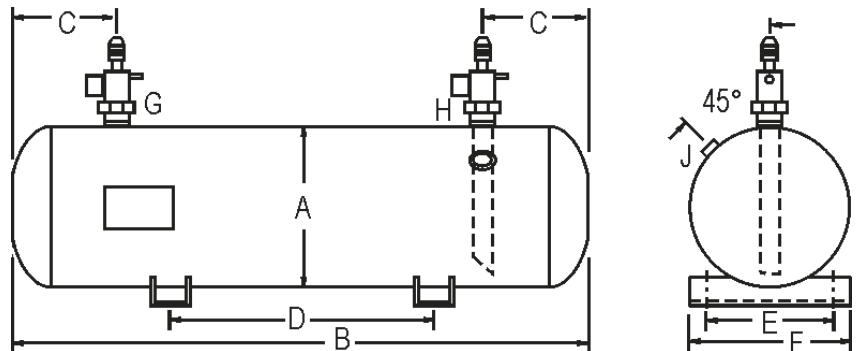


Figure 3

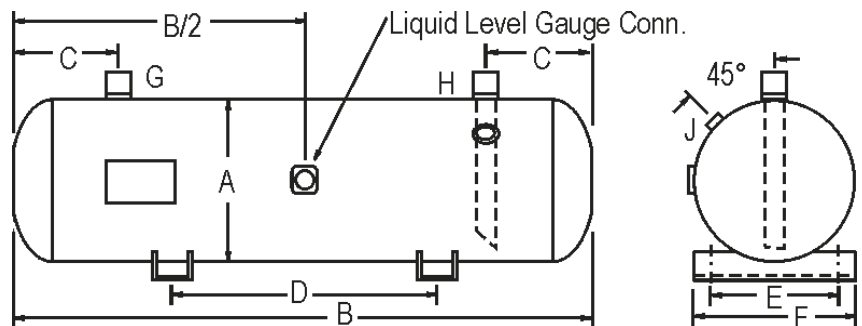

Catalog No. w/ Brackets	Fig. No.	Dimensions in Inches						Pump Down Cap. (lbs)				ODS Inlet (G)	ODS Outlet (H)	Relief NPT (J)	Int. Volume (ft ³) @ 90%	Wt. lbs
		A	B	C	D	E	F	R22	R134A	R404A	R407C					
S-8640V	2	8.625	36	4.63	18.00	4.63	9.00	68.7	69.7	59.5	66.8	7/8	7/8	1/2	0.95	65
S-8690V	2	10.75	36	6.50	18.00	6.50	11.00	105.3	106.9	91.3	102.4	1 1/8	1 1/8	1/2	1.45	115
S-8710V	2	10.75	60	6.50	30.00	9.00	11.00	180.1	182.8	156.2	175.1	1 1/8	1 1/8	1/2	2.48	166
S-8760V	2	12.75	60	8.00	30.00	11.00	13.00	255.8	259.5	221.7	248.7	1 3/8	1 3/8	1/2	3.53	218
S-8790	3	14	72	8.38	36.00	12.00	16.00	367.0	372.4	318.2	356.8	2 1/8	1 5/8	1/2	5.06	302
S-8810	3	16	60	8.88	30.00	14.00	18.00	400.0	405.8	346.7	388.9	2 5/8	2 1/8	1/2	5.52	366
S-8820	3	16	72	8.88	36.00	14.00	18.00	484.2	491.2	419.7	470.7	2 5/8	2 1/8	1/2	6.68	429
S-8830	3	16	84	8.88	42.00	14.00	18.00	568.3	576.6	492.7	552.5	3 1/8	2 1/8	1/2	7.84	492
S-8840	3	18	60	9.88	30.00	16.00	20.00	497.6	504.9	431.4	483.8	3 1/8	2 1/8	1/2	6.86	428
S-8850	3	18	72	9.88	36.00	16.00	20.00	603.5	612.4	523.2	586.8	3 1/8	2 1/8	1/2	8.32	499
S-8860	3	18	80	9.88	40.00	16.00	20.00	674.2	684.0	584.4	655.5	3 1/8	2 5/8	1/2	9.30	552
S-8870	3	20	72	10.50	36.00	18.00	22.00	726.4	737.1	629.8	706.3	3 1/8	2 5/8	1/2	10.02	555

- All Pump-down Capacities are calculated @ 90% of receiver volume @ 90°F.
- To convert to other refrigerants, consult technical service 800-627-5148.
- Quotations on custom models available upon request.

MAXIMUM WORKING PRESSURE: 450 PSIG.



Industrial & Commercial Refrigeration Products 800.96.HENRY